


NOTES:

1. FOR STREETS NOT IMPROVED FOR THE PRIOR FIVE YEARS TYPICAL RESTORATION LIMITS FOR ASPHALT PAVEMENT TO REPAIR CUTS ARE SHOWN.
2. WORK SHALL BE DONE IN ACCORDANCE WITH STANDARD SPECIFICATIONS FOR CONSTRUCTION SECTION 4.3: STREET CUT EXCAVATION AND REPAIR STANDARDS.
3. OFFSET OF PAVEMENT REPAIR SHALL BE A MINIMUM OF 2 FT. FROM EDGE OF UTILITY STREET CUT AND
 - 6 IN. FROM LONGITUDINAL PAVEMENT MARKINGS
 - OR
 - ON STREETS WITHOUT PAVEMENT MARKINGS TO NEAREST NOMINAL LANE LINE/JOINT
4. IF LONGITUDINAL DISTANCE BETWEEN REQUIRED REPAIRS IS LESS THAN 12 FT. THEN REPAIRS SHALL BE COMBINED.

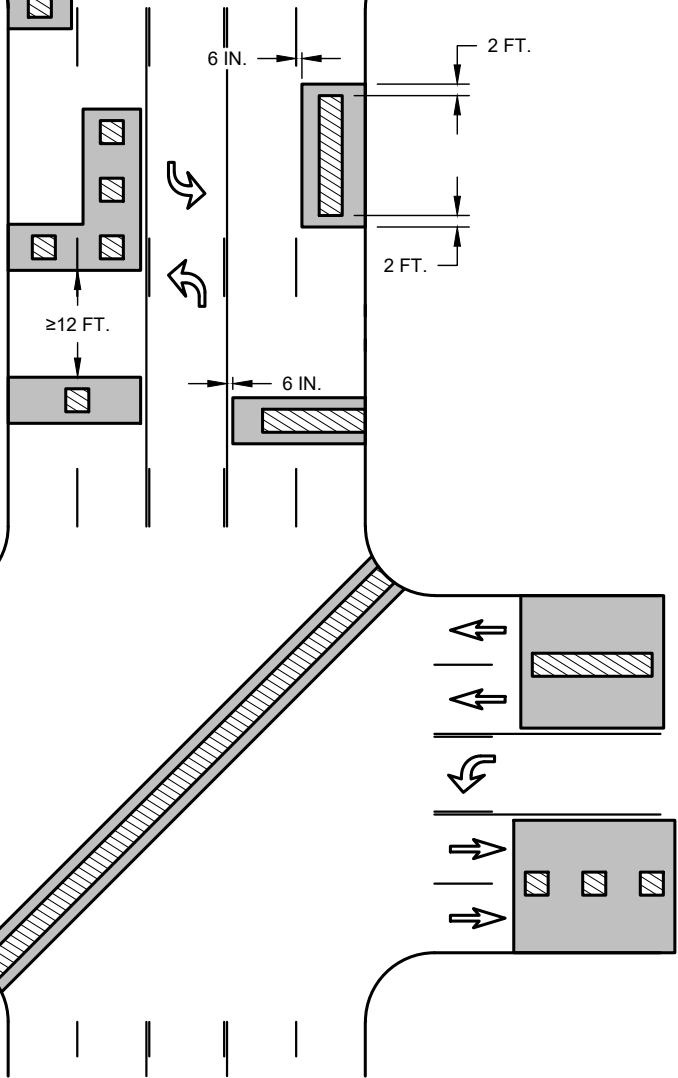

- UTILITY STREET CUT
- CITY STANDARD RESTORATION REQUIREMENTS FOR ASPHALT PAVEMENT. SEE STANDARD DETAILS G-7, G-8, G-9, G-10, ST-1, ST-30 AND ST-31

**ASPHALT STREET CUT REPAIR REQUIREMENTS
FOR STREETS NOT IMPROVED FOR THE PRIOR FIVE YEARS**

(NO SCALE)

DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY THE CITY OF WACO FOR ANY PURPOSE WHATSOEVER. THE CITY OF WACO ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.



**ENGINEERING
DIVISION**



REVISIONS			
NO.	COMMENTS	BY	DATE
1	CHANGE NOTES; ADD DIMENSIONS	MZ	10/27/2022
##	DESCRIPTION	FL	MM/DD/YYYY

DATE
07/01/2022

ST-34