



**PLAN VIEW - SANDBAG OPTION**

**PLAN VIEW - AGRICULTURAL BAIL OPTION**

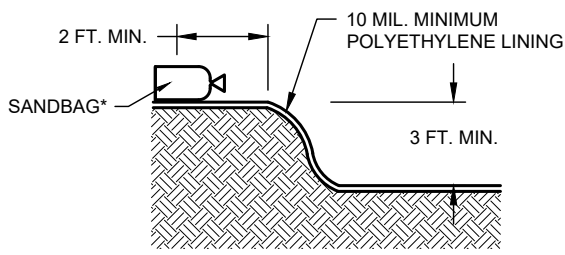


\*SANDBAG MAY BE REPLACED BY A SOIL BERM TO ANCHOR THE PLASTIC LINING.

**SECTION A-A**

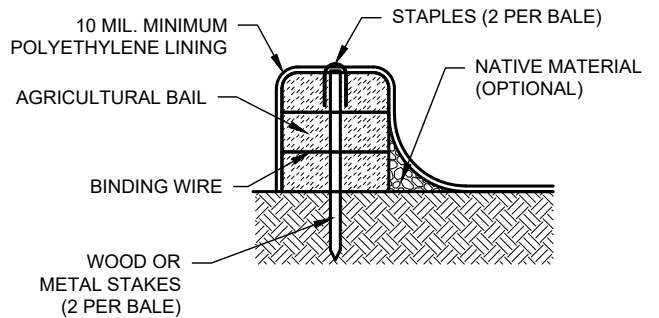

**SECTION B-B**

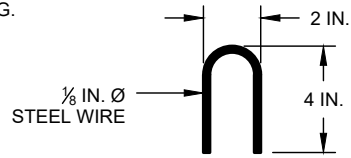

**STAPLE DETAIL**

**NOTES:**

1. WASHOUT AREA MUST BE CLEARLY MARKED WITH SIGNAGE NOTING THE WASHOUT AREA AND BE IDENTIFIED ON SWPPP MAP.
2. THE CONCRETE WASHOUT SIGN SHALL BE INSTALLED WITHIN 30 FT. OF THE TEMPORARY CONCRETE WASHOUT FACILITY.
3. A CONCRETE WASHOUT PIT OR OTHER CONTAINMENT SHALL BE INSTALLED A MINIMUM OF 50 FEET AWAY FROM INLETS, SWALES, DRAINAGE WAYS, CHANNELS, AND OTHER WATERS, IF THE SITE CONFIGURATION PROVIDES SUFFICIENT SPACE TO DO SO. IN NO CASE SHALL CONCRETE WASHOUT OCCUR CLOSER THAN 20 FEET FROM INLETS, SWALES, DRAINAGE WAYS, CHANNELS, AND OTHER WATERS.
4. WASHOUT AREA MUST ALLOW FOR 6 CUBIC FEET OF CONTAINMENT VOLUME FOR EVERY 10 CUBIC YARDS OF CONCRETE POURED.
5. THE CONTAINMENT SHALL BE LINED WITH POLYETHYLENE (MINIMUM 10 MILLIMETERS THICK) OR AN EQUIVALENT MEASURE TO PREVENT SEEPAGE TO GROUNDWATER.
6. PORTABLE, PREFABRICATED, CONCRETE WASHOUT CONTAINERS ARE COMMERCIALY AVAILABLE AND ARE AN ACCEPTABLE ALTERNATIVE TO THE ABOVE GRADE AND BELOW GRADE WASHOUT AREAS DEPICTED ABOVE.
7. WASHOUT STRUCTURES SHALL BE CLEANED OUT WHEN THE STRUCTURE IS 75% FULL. TEMPORARY CONCRETE WASHOUT FACILITY SHOULD BE MAINTAINED TO PROVIDE ADEQUATE HOLDING CAPACITY.

**CONCRETE WASHOUT DETAILS**

(NO SCALE)

DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY THE CITY OF WACO FOR ANY PURPOSE WHATSOEVER. THE CITY OF WACO ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.



**ENGINEERING  
DIVISION**



REVISIONS			
NO.	COMMENTS	BY	DATE
##	DESCRIPTION	FL	MM/DD/YYYY

DATE  
05/02/2022

**WP-6**