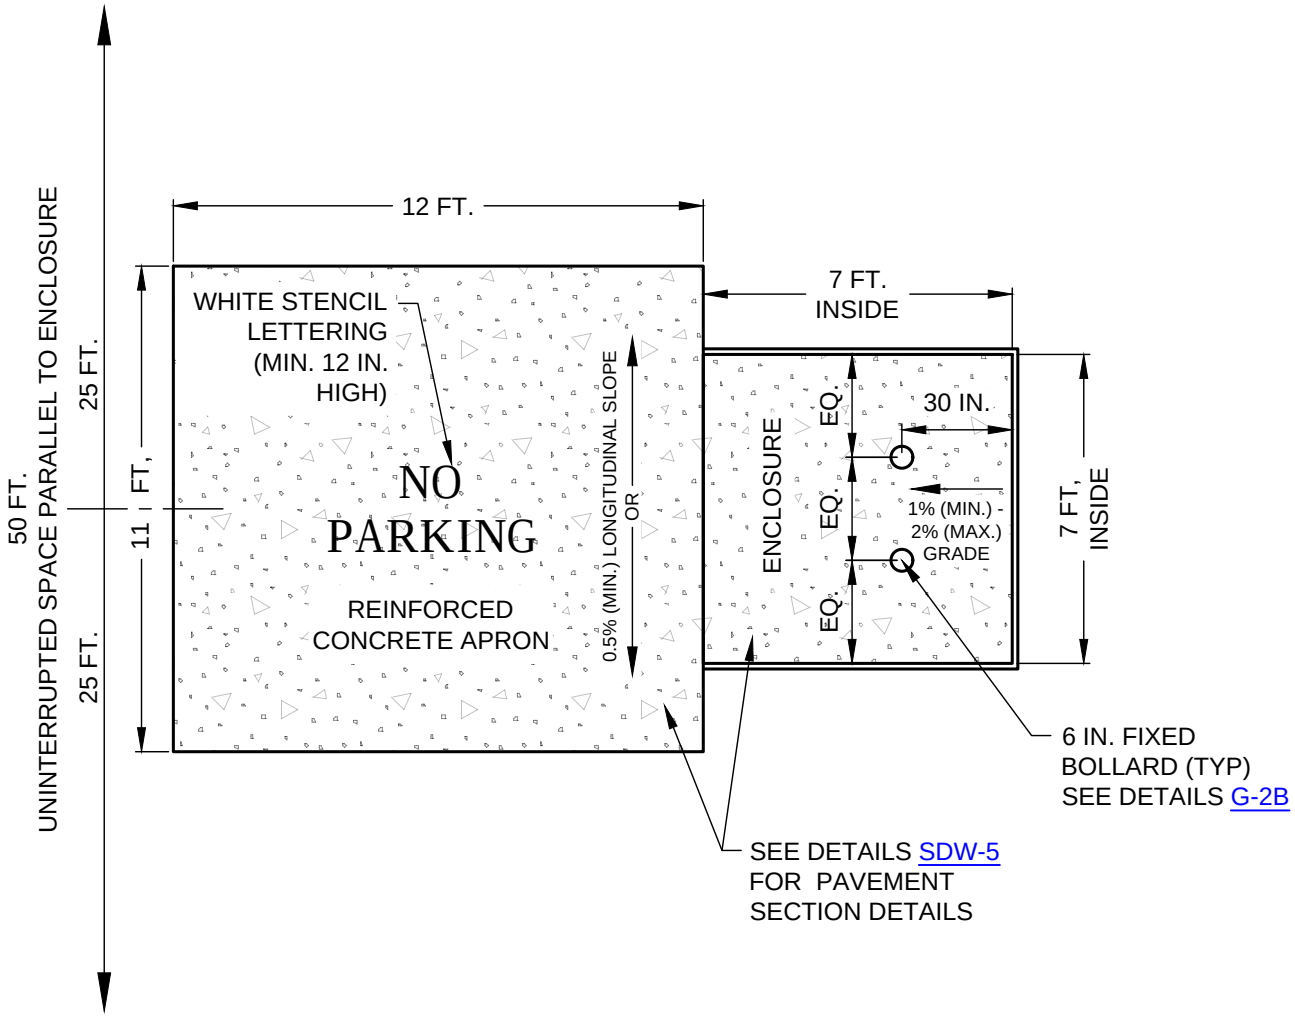

NOTES:

1. INSIDE DIMENSION OF ENCLOSURE SHALL BE 7 FT. X 7 FT. OF UNINTERRUPTED SPACE. AN ADDITIONAL 12 FT. X 11 FT. REINFORCED CONCRETE PAD SHALL BE PARALLEL TO ENCLOSURE TO PROVIDE A FIRM PLATFORM FOR SERVICE.
2. ENCLOSURE MUST BE PARALLEL TO DRIVE, ALLEY OR FIRE LANE AND ALLOW ROOM FOR VEHICLE TO APPROACH. DOORS ARE NOT ALLOWED ON SIDE LOAD ENCLOSURES.
3. SIDE LOAD WASTE CONTAINERS REQUIRE SOLID WASTE MANAGEMENT APPROVAL.
4. APRON SHALL BE GRADED TO DRAIN TOWARDS APPROVED DRAINAGE PATH WITH A MINIMUM 0.5% LONGITUDINAL SLOPE.

SIDE LOAD WASTE CONTAINER PAD DETAILS

(NO SCALE)

CITY OF WACO

ENGINEERING DIVISION

DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY THE CITY OF WACO FOR ANY PURPOSE WHATSOEVER. THE CITY OF WACO ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

REVISIONS

NO.	COMMENTS	BY	DATE
##	DESCRIPTION	FL	MM/DD/YYYY

DATE 01/01/2024

SDW-3