


PAVEMENT THICKNESS LESS THAN 8 INCHES

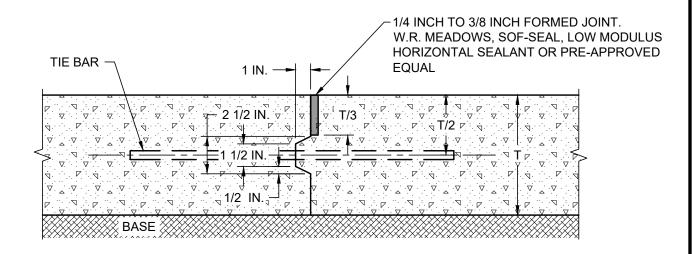

PAVEMENT THICKNESS 8 INCHES AND GREATER

NOTES:

- PRESSED SHEET METAL KEYWAY FOR BENT TIE BAR SHALL BE HELD IN PLACE BY CLAMPS AND STAKES.
- FOR PAVEMENTS LESS THAN 8 INCHES THICK, PAVEMENT SHALL BE THICKENED TO 8 INCHES ON EACH SIDE OF PROPOSED JOINT.
- 3. TIE BARS SHALL BE 24 IN. LONG #4 DEFORMED BARS AT 12 IN. SPACING.
- 4. CONCRETE SHALL BE REINFORECED WITH A MINIMUM #4 REBAR AT 12 INCHES OCEW (NOT SHOWN FOR CLARITY).

CONCRETE STREET KEYWAY CONSTRUCTION JOINT DETAIL

(SPACED AS PER PLANS) (NO SCALE)



	ENGINEERING DIVISION	NO.	REVISIONS COMMENTS	DATE 01/01/2024		
	DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY					01/01/2024
	THE CITY OF WACO FOR ANY PURPOSE WHATSOEVER. THE CITY OF WACO ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD			\vdash		\circ T \circ
١	TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES			\vdash		S1-8
4	RESULTING FROM ITS USE.	##	DESCRIPTION	FI	MM/DD/YYYY	