


PAVEMENT THICKNESS LESS THAN 8 INCHES

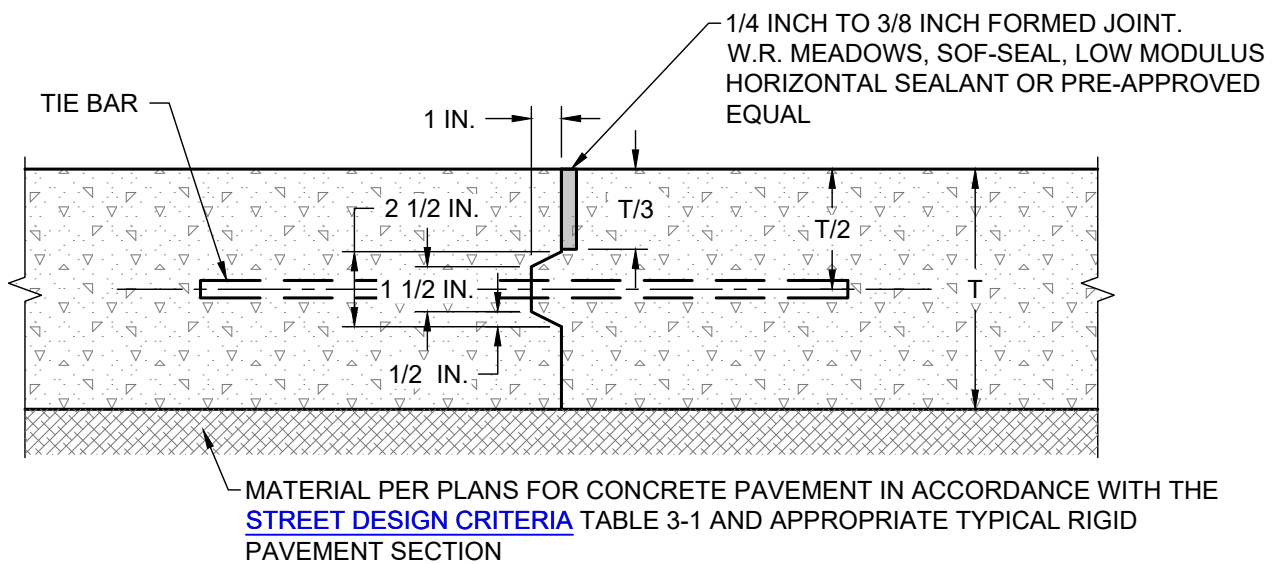

PAVEMENT THICKNESS 8 INCHES AND GREATER

NOTES:

1. PRESSED SHEET METAL KEYWAY FOR BENT TIE BAR SHALL BE HELD IN PLACE BY CLAMPS AND STAKES.
2. FOR PAVEMENTS LESS THAN 8 INCHES THICK, PAVEMENT SHALL BE THICKENED TO 8 INCHES ON EACH SIDE OF PROPOSED JOINT.
3. TIE BARS SHALL BE 24 IN. LONG #4 DEFORMED BARS AT 12 IN. SPACING.
4. CONCRETE SHALL BE REINFORCED WITH A MINIMUM #4 REBAR AT 12 INCHES OCEW (NOT SHOWN FOR CLARITY).

CONCRETE STREET KEYWAY CONSTRUCTION JOINT DETAIL

(SPACED AS PER PLANS)

(NO SCALE)



ENGINEERING DIVISION

DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY THE CITY OF WACO FOR ANY PURPOSE WHATSOEVER. THE CITY OF WACO ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

REVISIONS			
NO.	COMMENTS	BY	DATE
1	MODIFY BASE MATERIAL NOTES	MZ	04/28/2025
##	DESCRIPTION	FL	MM/DD/YYYY

DATE
01/01/2024

ST-8